

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/78458 A1(51) International Patent Classification⁷: B02C 7/14,
D21B 1/14, D21D 1/30(SE). HÄRKÖNEN, Esko [FI/FI]; Jauhokalliontie 1 E 14,
FIN-87200 Kajaani (FI).

(21) International Application Number: PCT/SE00/01257

(74) Agents: JOHANSSON WEBJÖRN, Ingmari et al.; L.A.
Groth & Co.KB, P.O. Box 6107, S-102 32 Stockholm (SE).

(22) International Filing Date: 15 June 2000 (15.06.2000)

(81) Designated States (national): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH,
CN, CR, CU, CZ, CZ (utility model), DE, DE (utility
model), DK, DK (utility model), DM, DZ, EE, EE (utility
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US,
UZ, VN, YU, ZA, ZW.

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
9902306-1 17 June 1999 (17.06.1999) SE(71) Applicant (for all designated States except US): VALMET
FIBERTECH AB [SE/SE]; S-851 94 Sundsvall (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BACKLUND,
Hans-Olof [SE/SE]; Bågevägen 43 D, S-856 52 Sundsvall
(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian*[Continued on next page]*

(54) Title: A METHOD AND MEANS FOR MEASURING STRESS FORCES IN REFINERS

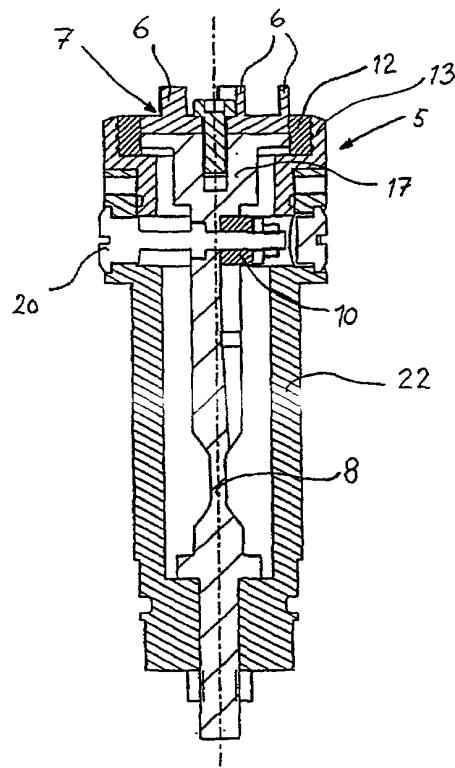

(57) Abstract: The invention relates to a method and a device for measuring stress forces in refiners having refining discs that between them define a refining gap for refining material between bars (3) arranged on the refining discs. According to the invention measurement is performed across a measuring surface (7) constituting a part of a refining disc, and said measuring surface comprises at least parts of more than one bar (6).